

Description

The Pitot Tube is a differential pressure producer suitable for air flow measurement. It includes multiple sensing points to measure total and static pressures. It is easy to install and cost effective. It offers simple, low cost installation into pipes and ducts, and high energy savings due to its low unrecovered pressure loss. There are no moving parts or sharp edges to wear, so long term accuracy can be maintained. It contains a rubber cap, Plastic base and two 1 meters length air tube.



Features:

- Air Flow Measurement
- Low Installation Costs
- Long Term Accuracy
- Minimal Unrecovered Pressure Loss
- Mass Flow Measurement



Pitot Extrusion



Air tube



Plastic Base




Rubber cap



Screw

Specifications

| | | |
|-------------|-----------------------|---|
| Probe | Material | Aluminium alloy |
| | Dimensions | 7.8 x 19.5mm (0.3"x 0.8") |
| | Tubing inner diameter | Φ3.8mm |
| Rubber cap | Material | Rubber |
| | Connections | To suit 4mm (0.16") i/d PVC air tubing |
| Duct flange | Material | ABS |
| | Dimensions | 30 x 75mm (1.2"X 3") |
| Air tube | Material | PU |
| | Dimensions | inside and out side diameter Φ 4 x Φ6mm length 1m |

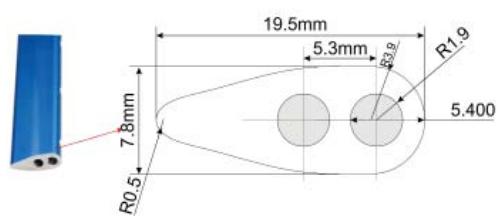

Part Number Scheme

PT-250

| Code | Description |
|------|-------------|
| PT | Pitot Tube |

| Code | Pitot Length |
|------|--|
| 100 | 4" |
| 150 | 6" |
| 200 | 8" |
| 250 | 10" |
| 300 | 12" |
| * | Other custom lengths are available, no minimum order |

K Factor

| Velocity (KM/H) | Fan speed(Hz) | Pitot length(mm) | | 150 | 200 | 250 | 300 | 350 | Average (mBar) | Comments / Remarks |
|--------------------|---------------|------------------|-------|-------|-------|-------|-------|-------|-------------------|--------------------|
| | | 60 | 55 | 0.420 | 0.421 | 0.427 | 0.424 | 0.451 | 0.429 | |
| 25.2 | 60 | 0.420 | 0.421 | 0.427 | 0.424 | 0.451 | 0.429 | | | |
| 23.7 | 55 | 0.360 | 0.365 | 0.377 | 0.368 | 0.393 | 0.373 | | | |
| 21.7 | 50 | 0.306 | 0.307 | 0.314 | 0.308 | 0.332 | 0.313 | | | |
| 19.8 | 45 | 0.245 | 0.250 | 0.258 | 0.251 | 0.269 | 0.255 | | | |
| 17.7 | 40 | 0.197 | 0.195 | 0.198 | 0.195 | 0.208 | 0.199 | | | |
| 15.1 | 35 | 0.146 | 0.148 | 0.149 | 0.147 | 0.156 | 0.149 | | | |
| 12.6 | 30 | 0.103 | 0.101 | 0.102 | 0.100 | 0.107 | 0.103 | | | |
| 9.6 | 25 | 0.060 | 0.060 | 0.059 | 0.056 | 0.059 | 0.059 | | | |
| 7.4 | 20 | 0.032 | 0.033 | 0.034 | 0.034 | 0.036 | 0.034 | | | |

| Fan Speed (Hz) | Left Side (KM/H) | Center (KM/H) | Right Side (KM/H) | Average Speed (KM/H) |
|-------------------|---------------------|------------------|----------------------|-------------------------|
| 60 | 25.1 | 24.8 | 25.6 | 25.2 |
| 55 | 23.6 | 23.3 | 24.1 | 23.7 |
| 50 | 21.7 | 21.2 | 22.2 | 21.7 |
| 45 | 19.6 | 19.4 | 20.3 | 19.8 |
| 40 | 17.7 | 17.4 | 17.9 | 17.7 |
| 35 | 15.1 | 14.8 | 15.4 | 15.1 |
| 30 | 12.8 | 12.4 | 12.6 | 12.6 |
| 25 | 9.6 | 9.4 | 9.7 | 9.6 |
| 20 | 7.7 | 7.2 | 7.4 | 7.4 |


Velocity(KM/H) column data in up table is same as Average speed(KM/H) column data in below table.

Average speed(KM/H)=(left side(KM/H) + center(KM/H) + right side(KM/H)) /3

Average(mBar)=(150column + 200column + 250column + 300column+ 350column) /5

Instructions for installation

1 Duct orientation and sensor mounting

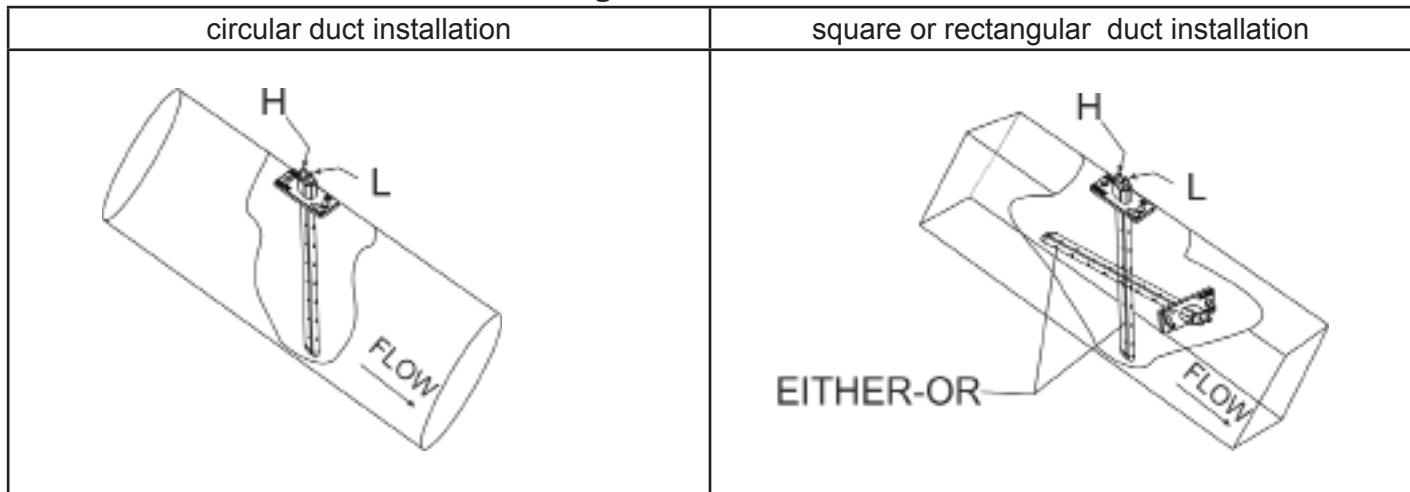


2 Instructions for installation

Step1:The primary station can be installed in any position on vertical or horizontal lines.However consideration to easy accesss of insrument connections should be given.

Step2:See location instrctions for best reselts.

Step3:Drill a 1-7/8" hole in the center of the duct or pipe where the sensor is to be installed.Drill a 1/2" hole on the opposite side for the double support.

Step4:Attach opposite end-guide rod and pass through both holes.Ensure correct direction of flow.Secure mounting plate to duct or pipe with (2) self-tapping screws.

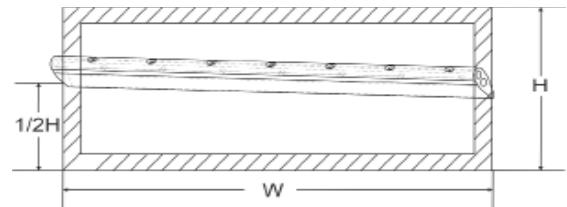

Preferred Mounting

